



Company's Safety Management System certified by



Company's Quality Management System certified by



X 12 - X 20

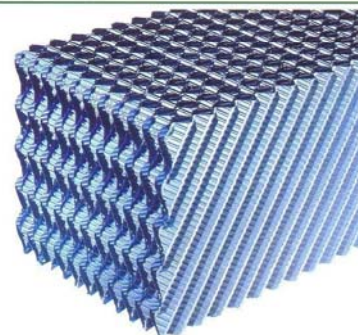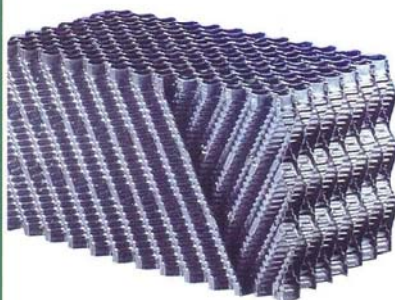

Y 20



LC 40



FILM FILLING TECHNICAL DATA SHEET

	X 12	X 20	Y 20	LC 40
Material	PVC/PP	PVC/PP	PVC/PP	PVC
Width of channel (mm)	12	20	20	37
Slope of channel (°)	30	30	0/25	10
Thickness of material (µm)	260÷400	260÷400	280÷420	420
Dry weight (Kg/m ³)	24÷37	22÷32	19÷28	16.5
Specific area (m ² /m ³)	240	145	148	92
Min/Max operating temperature (C°)	-40/60	-40/60	-40/60	-40/60
Standard block dimensional L x W x H (mm)	1200÷2400 x 300 x 600 (h.)			
Manufacturing procedure	Thermo/vacuum formed			
Connection of film sheet to blocks	Gluing/Welding			

Notes: 1) Minimum temperature - 40° C can be guaranteed by mean of special additives into the raw materials
 2) For PP film filling max operating temperature is equal to 80°C