


Company's Safety Management System certified by



Company's Quality Management System certified by




STAR
12/20/40

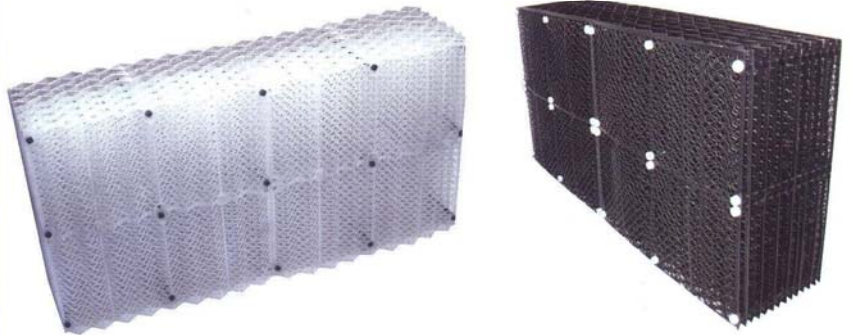

HP 600



FUTURA

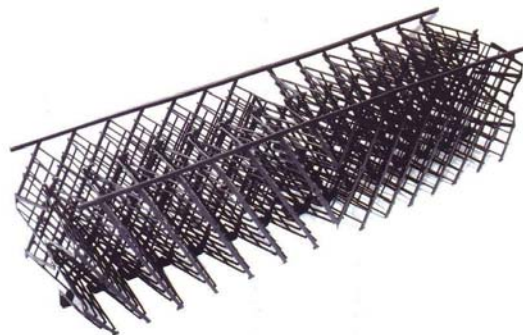

SPLASH FILLING TECHNICAL DATA SHEET

	HP 600	FUTURA	STAR 12/20/40
Material	PP	PP	PP
Standard Dimensions - L x W x H (mm)	600 x 600 x 22 (h.)	1200 x 300 x 300 (h.)	1200 x 307 x 600 (h.)
Unit Dry Weight (Kg)	0.51	2.4	14/11/7.8
Min./Max. operating temperature (C°)	-40/80	-40/80	-40/80
Manufacturing procedure	Injection Moulding	Injection Moulding	Injection Moulding
Assembly connections	Wire/Support/Spacer	Clips	PP Connectors/Tie rods

Notes: Minimum temperature - 40 can be guaranteed by adding special additives into the raw material

SPLASH FILLING

SCAM TOWERS PACKAGE EQUIPMENT S.r.l.
 Corso Torino 91/C – 10090 Buttigliera Alta – TO – Italy
 Phone + 39 011 9330411 - Fax + 39 011 9330412
 @mail: info@scamtpe.it - Web site: www.scamtpe.it

